

### Facestock

A white, woodfree printing paper with a high sensitivity thermal coating providing good image resolution. The facestock is produced without use of Bisphenol A. This product is compliant with Annex XVII to Regulation (EC) No 1907/2006.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	70 g/m <sup>2</sup>	ISO 536
Caliper	74 µm	ISO 534
Image Density (Min)	1.20 odu	
Max Print Speed	200 mm/sec	

### Adhesive

A special purpose permanent, rubber based adhesive for deepfreeze and low temp

### Liner

BG40 brown, supercalendered glassine paper.

Basis Weight	54 g/m <sup>2</sup>	ISO 536
Caliper	47 µm	ISO 534

### Laminate

Total Caliper	137 µm±10%	ISO 534
---------------	------------	---------

### Performance Data

Initial Tack	14 N/25mm	FTM 9 Glass
Peel Adhesion 90°	7.5 N/25mm	FTM 2 St.St.
Min. Application Temp.	-25 °C	
Service Temperature	-50 °C to 50 °C	

### Adhesive Performance

The adhesive is specially designed for use at low temperature and freezer conditions. It features good tack and adhesion to a wide variety of packaging materials, such as paper, cardboard and films, including apolar, curved or irregular substrates. Generally good adhesion performance can even be achieved on slightly frosted surfaces.

### Applications and Use

This Direct Thermal product is designed for use in dry weigh scale, process tracking, point of sale item information labelling where limited image durability is required. Typical end applications include fruit and vegetable weigh scale, hardware, work-in-process material tracking. Contact with moisture, oil, fats, plasticizers and exposure to strong lighting should be avoided due to potential image fade. This product is produced without the use of Bisphenol A (BPA).


### Conversion and Printing

This product is designed to be converted and dispensed at high speed by all conventional roll conversion technologies, including flexographic and UV letterpress. Due to the thermographic properties, exposure above 50°C may cause premature imaging or discolouration. Inks containing alcohol or volatile organic solvents may also cause discoloration. It is advisable to test inks and varnishes before conversion. We generally recommend not to pre-print the area which will be thermally imaged.

## BS380

## Fasson®

### THERMAL ECO BPA FREE FSC C2075N-BG40BR

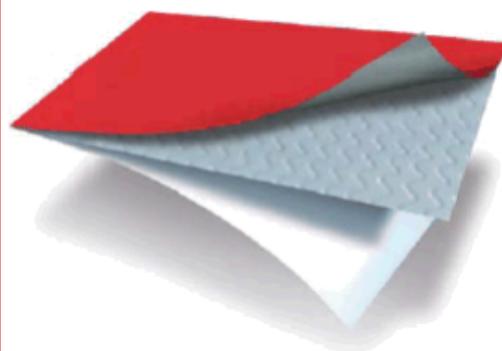

THERMAL ECO BPA FREE FSC	
-----------------------------	--

C2075N	
--------	---

BG40BR	
--------	---



The mark of  
responsible forestry

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Compliance and Approvals

The adhesive is suitable for contact with dry and moist, non-fatty foodstuffs. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

### Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2022 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.